


Asycube 50

Flexible Vibrating Feeder for Parts from 0.1 to 5 mm





3-Axis Vibration Technology Innovation by asyril





Feeder Advantages

- ► Compatible with all part geometries: 99% of parts can be fed on our feeders including complex geometries and delicate materials
- ► Extremely gentle part handling due to Asyril's innovative 3-axis vibration technology: parts can be moved in all directions, including the optimal choice of flipping amplitude for each part. Minimal abrasion as parts do not need to be recirculated. Platform purge possible
- Advanced reliability and durability due to State-of-the-Art Voice Coil Technology; no compressed air
- ► Avoid backfeeding of vibration into surrounding machines thanks to isolation of vibratory platform and feeder base
- ▶ **Precise part detection** thanks to integrated, adjustable backlight / optional EYE+ Smart Control System
- ▶ **Systematic part orientation** can be achieved with intelligently structured platforms (grooves, holes, nests, various materials)
- Minimum production changeover times enable flexible, future-proof production systems
- ▶ **Easy configuration** with Asyril's Feeder Control Center Software
- Various hopper sizes




Asycube 50

Flexible Vibrating Feeder for Parts from 0.1 to 5 mm

How it works


- 1. Homogeneous parts separation and orientation using Asvril's innovative 3-Áxis Vibration
- 2. Detection of correctly 3. Part pick from oriented parts by control system (e.g. EYE+)
- platform and assembly by robot

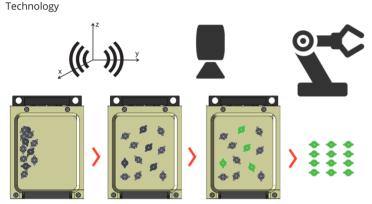

Parts are spread homogeneously on the feeder surface and can even be systematically oriented in many cases by using intelligent vibration patterns in combination with a structured plate. Entire part families can thus be handled with a single feeder, making the system highly future-proof.

Asyril's innovative 3-Axis Vibration Technology

Systematic part orientation can be achieved with intelligently structured platforms (grooves, holes, nests).

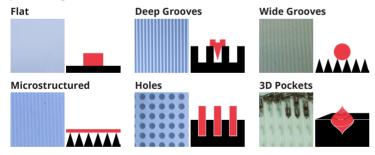

- Asyril's unique and patented 3-axis vibration technology allows moving parts freely on a platform in different directions.
- Using Asyril's intuitive HMI interface, the platform vibration parameters can be tuned specifically for an optimal part distribution and fastest resulting cycle time. A functioning part feeding recipe is typically created in less than 5 minutes

About Asyril

- Asyril develops, produces and markets high performance flexible feeding systems for parts and components from <0.1 up to 150 mm in size. Our innovative 3-axis vibration technology can handle bulk parts of any geometry and allows for extremely gentle part feeding.
- Asyril's key competences and extensive know-how encompass all three sub-domains of modern part feeding systems: vibration technology, industrial vision and precision robotics. This unique focus combined with our many years of experience enable us to deliver superior, innovative flexible feeding systems for today's and tomorrow automation challenges.

Specifications

GENERAL INFORMATION


Power supply 24 V / 6 A				
Backlight synchronization input				
	CP/IP), Modbus TCP , EtherCAT, PROFINET, CC-Link			
Librairies / Software ELECTRIC -	C - DENSO - MITSUBISHI MICROSOFT.NET - STÄUBLI - ROBOTS - YAMAHA - YASKAWA			

OPTIONS

Smart Control System	EYE+	
Integrated LED backlight	red / green / blue / white / infrared	
Vibration plate	flat / holes / grooves / nests / pockets / various materials	
Purge platform		
Calibration plate		
Connection cables	power / communication / backlight	
Various hopper sizes	10 cm ³ 110 cm ³	
Custom platform material	on demand (e.g. medical)	

DIMENSIONS

Description	Reference	Dimensions	
		[mm]	[~inches]
Typical part size		0.1 - 5	~ 0.004 - 0.2
Vibration platform	Α	34	~ 1.4
	В	45	~ 1.8
Footprint	С	46	~ 1.8
	D	293	~ 11.6
	D'	50	~ 2.0
Maximum height	E	140	~ 5.5
Pick height	F	110	~ 4.4



Contact







scan to see the videos www.asyril.com sales@asyril.com Tel +41(0) 26 653 71 90 youtube.com/AsyrilSA