


Asycube 380

Flexible Vibrating Feeder for Parts from 15 to 60 mm



3-Axis Vibration Technology Innovation by asyril

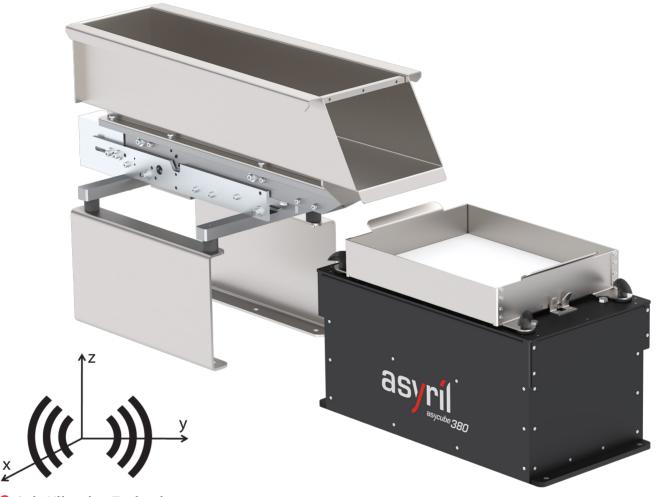



Feeder Advantages


- ► **Compatible with all part geometries**: 99% of parts can be fed on our feeders including complex geometries and delicate materials
- ➤ **Gentle part handling due to Asyril's innovative 3-axis vibration technology**: parts can be moved in all directions, including the optimal choice of flipping amplitude for each part. Minimal abrasion as parts do not need to be recirculated. Platform purge possible
- ► Advanced reliability and durability due to State-of-the-Art Voice Coil Technology; no compressed air
- ► **Precise part detection** thanks to integrated, adjustable backlight / optional EYE+ Smart Control System
- ▶ **Systematic part orientation** can be achieved with intelligently structured platforms (grooves, holes, nests, various materials)
- Minimum production changeover times enable flexible, future-proof production systems
- **Easy configuration** with Asyril's parameterization Software
- Various hopper sizes

Asycube 380

Flexible Vibrating Feeder for Parts from 15 to 60 mm

How it works


- 1. Homogeneous parts separation and orientation using Asyril's innovative 3-Axis Vibration Technology
- 2. Detection of correctly 3. Part pick from oriented parts by control system (e.g. EYE+)
- platform and assembly by robot

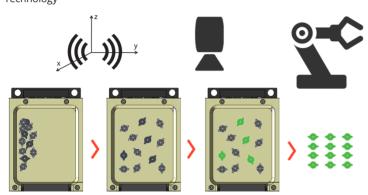

Parts are spread homogeneously on the feeder surface and can even be systematically oriented by using intelligent vibration patterns in combination with a structured plate. Entire part families can thus be handled with a single feeder, making the system highly future-proof.

Asyril's innovative 3-Axis Vibration Technology

Systematic part orientation can be achieved with intelligently structured platforms (grooves, holes, nests).

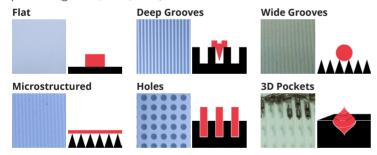

- Asyril's unique and patented 3-axis vibration technology allows moving parts freely on a platform in different directions.
- Using Asyril's intuitive HMI interface, the platform vibration parameters can be tuned specifically for an optimal part distribution and fastest resulting cycle time. A functioning part feeding recipe is typically created in less than 5 minutes

About Asyril

- Asyril develops, produces and markets high performance flexible feeding systems for parts and components from <0.1 up to 150 mm in size. Our innovative 3-axis vibration technology can handle bulk parts of any geometry and allows for extremely gentle part feeding.
- Asyril's key competences and extensive know-how encompass all three sub-domains of modern part feeding systems: vibration technology, industrial vision and precision robotics. This unique focus combined with our many years of experience enable us to deliver superior, innovative robotic feeding systems for today's and tomorrow automation challenges.



Specifications

GENERAL INFORMATION

Power supply	24 V / 20 A			
Backlight synchronization input				
Communication	Ethernet (TCP/IP), Modbus TCP			
Optional via Gateway	EtherNet/IP, EtherCAT, PROFINET, CC-Link			
Communication	ABB - FANUC - DENSO - MITSUBISHI			
Librairies / Software	ELECTRIC - MICROSOFT.NET - STÄUBLI -			
plugins	UNIVERSAL ROBOTS - YAMAHA - YASKAWA			


OPTIONS

Smart Control System	EYE+	
Integrated LED backlight	red / green / blue / white / infrared	
Vibration plate	flat / holes / grooves / nests / various materials (antistatic, medical, FDA)	
Connection cables	power / communication / backlight / I/O	
Hopper size	10 liters	
Inputs / Outputs (I/O)	2 digital inputs 24 V 2 digital outputs 24 V 2 analog outputs 0-10 V	

DIMENSIONS

Description	Reference	Dimensions	
		[mm]	[~inches]
Typical part size		15 - 60	~ 0.6 - 2.4
Vibration platform	А	254	~ 10
	В	325	~ 12.8
Footprint	С	257	~ 10.1
	D	499	~ 19.6
	D'	115	~ 4.5
Maximum height	E	307	~ 12.1
Pick height	F	245	~ 9.65





Contact



Asyril SA 7.L du Vivier 22 CH-1690 Villaz-St-Pierre **SWITZERLAND**



scan to see the videos www.asyril.com sales@asyril.com Tel +41(0) 26 653 71 90 youtube.com/AsyrilSA